



Vandal Proof IP Camera

NVIP-1DN3001V/IR-1P

6000 VSS
IP



FUNCTIONS



COMPATIBILITY



KEY FEATURES

- Resolution: 1.3 MPx
- Lens: varifocal, f=2.8 ~ 12 mm/F1.4
- D/N function - IR cut filter
- Min. Illumination from 0.03 lx (0 lx, IR on)
- IR LED, range up to 20 m

DIMENSIONS

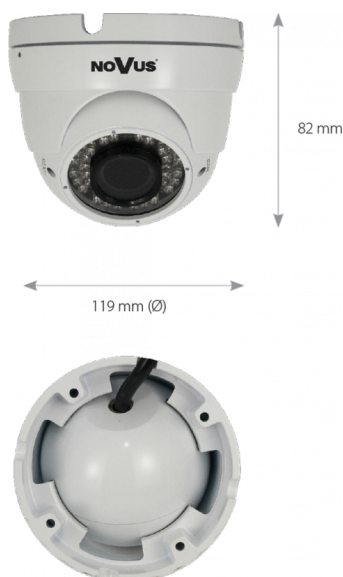


Image	
Image Sensor	1.3 MPx CMOS sensor 1/3" SONY Exmor
Number of Effective Pixels	1280 (H) x 1024 (V)
Min. Illumination	0.14 lx/F1.4 - color mode, 0.03 lx/F1.4 - B/W mode, 0 lx (IR on) - B/W mode
Electronic Shutter	auto: 1/25 s ~ 1/100000 s
Wide Dynamic Range (WDR)	yes
Digital Noise Reduction (DNR)	3D
Defog Function (F-DNR)	yes
Lens	
Lens Type	varifocal, f=2.8 ~ 12 mm/F1.4
Day/Night	
Switching Type	mechanical IR cut filter
Switching Mode	auto, manual
Switching Level Adjustment	yes
Switching Schedule	yes
Visible Light Sensor	yes
Network	
Stream Resolution	1280 x 1024 (SXGA), 1280 x 960, 1280 x 720 (HD), 640 x 480 (VGA), 320 x 240 (QVGA)
Frame Rate	30 fps for 1280 x 1024 (SXGA) and lower resolutions
Multistreaming Mode	2 streams
Video/Audio Compression	H.264/G.711
Number of Simultaneous Connections	max. 4
Bandwidth	11 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4, FTP, DHCP, DDNS, NTP, RTSP, PPoE, SMTP
Camera Configuration	from Internet Explorer, Firefox, Chrome, Opera browser languages: Polish, English, Russian, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS
Other functions	
Privacy Zones	4
Motion Detection	yes
Image Processing	Defective Pixel Correction (DPC), 180° image rotation, sharpening, mirror effect
Prealarm/Postalarm	-up to 120 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server
IR LED	
LED Number	42
Range	20 m
Angle	90°
Interfaces	
Video Output	BNC, 1.0 Vp-p, 75 Ohm
Audio Input/Output	1 x Jack (3.5 mm)-
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Installation parameters	
Dimensions (mm)	119 (Ø) x 82 (H)
Weight	0.71 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	vandalproof aluminium, white
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Power Consumption	3.6 W, 7 W (IR illuminator on)
Operating Temperature	-40°C ~ 50°C