



AHD Recorder

NHDR-5132AHD

5000
AHD SERIES




FUNCTIONS



KEY FEATURES

- Video channels: 32, audio channels: 4
- Recording speed: up to 800 fps (AHD), up to 200 fps (IP)
- Internal HDDs mount: up to 4
- Monitor outputs: 2 (2 x main, 1 x spot)
- Advanced network software
- Supports HD analog cameras (720p, 1080p)
- IP cameras support (hybrid mode)
- PIR cameras support
- Supports POS devices

DIMENSIONS

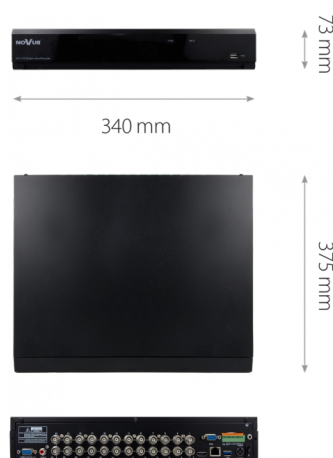

Video	
Video Input	32 x BNC
Operating mode	AHD 1080p, AHD 720p, analog 960H
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI (4K UltraHD), 1 x VGA (FullHD), spot: 1 x VGA (HD) interchangeably to main output
IP Streams	DVR mode: 32 x BNC + 0 x IP hybrid mode: 32 x BNC + 8 x IP
Supported IP resolution	max. 2688 x 1520
Audio	
Audio Input/Output	4 x RCA (Line-in)/1 x HDMI, 1 x RCA
Recording	
Compression	H.264
Recording Speed	800 fps (960 x 576 - 960H) 800 fps (1280 x 720 - HD) 480 fps (1920 x 1080 - FullHD)
IP recording speed	hybrid mode: 200fps
IP stream size	hybrid mode: 32 Mb/s in total from all IP cameras
Recording Mode	continuous, triggered by: REC/PANIC button, alarm input, motion detection, PIR alarm
Schedule	individual settings for: each camera, each day of the week, configuration with an accuracy of: 30 min, possibility of combining individual recording modes
Prealarm/postalarm	up to 3 s/up to 5 min
Playback	
Playback speed	400 fps
IP playback speed	200 fps
Recorded Data Search	by date/time, events, object appearance/disappearance, POS
Backup	
Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	BMP, MP4, AVI, H264
Storage	
Internal storage	available mount: 4 x HDD 3.5" SATA
Total Internal Capacity	24 TB
External storage	1 x eSATA
Total External Capacity	24 TB
Alarm	
Alarm Input/Output	8/1 relay type
Motion Detection	36 x 44 grid, individual settings of sensitivity, PIR cameras support
System Reaction to Alarm Events	buzzer, e-mail, alarm output activation, screen message, recording activation
Network	
Network Interface	1 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s
PC/MAC Software	NMS, Internet Explorer, NHDR-5000 Viewer/NHDR-5000 Viewer
Mobile applications	RxCamView (iPhone, Android)
Number of Simultaneous Connections	up to 5 (live monitoring: 5, playback: 1, configuration: 5)
Bandwidth	32 Mb/s in total to all client workstations
PTZ	
PTZ Ports	1 x RS-485
PTZ Protocols	Pelco-D, Pelco-P
PTZ Functions	pan/tilt/zoom, preset commands, patterns
COAX	
COAX Functions	menu, zoom, focus, PTZ
POS	
Number of POS channels	4
POS Interface	Ethernet
POS Functions	display text on the video, keyword search, export text with the video
Auxiliary Interfaces	
USB Ports	1 x USB 3.0, 1 x USB 2.0
Operating system	
Operating System	Linux
OSD	languages: Polish, English, Russian, others
Control	PC mouse and IR remote controller (in-set included), network, NV-KBD50 keyboard
System Diagnostic	automatic control of: HDDs, camera connection loss
Installation parameters	
Dimensions (mm)	375 (W) x 73 (H) x 340 (D)
Weight	2.8 kg (without HDDs)
Power Supply	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Power Consumption	50 W (with 4 HDDs)
Operating Temperature	-10°C ~ 45°C

List of compatible HDD models and maximum of their capacities is available in section DOWNLOADABLE FILES.
Multistandard and eSATA is available in DVR from serial No 1704.
POS feature available from NHDR5132AHD_V180125_W firmware.
One of the functions: SPOT monitor, POS can be switched on at once.
Recording speed may be limited in POS mode.