



24-port PoE+ Managed Switch


NVS-5024SP+



KEY FEATURES

- 24 x 100Mb/s PoE+
- 2 x 1000Mb/s UPLINK, 2 x 1000Mb/s SFP UPLINK

DIMENSIONS

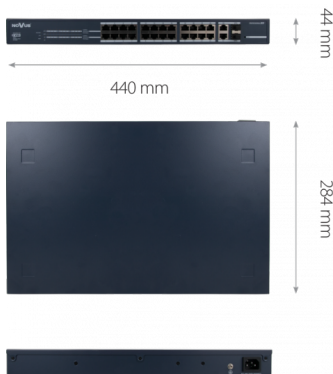

GENERAL	
Device Type	PoE+ Managed Switch
NETWORK	
Ports	PoE+ Ports: 24 x 10Mb/s / 100Mb/s (at the same time the number of available ports on the PoE + mode, limited by capacity power supply), Uplink Combo x 2 :SFP(1Gb/s) + RJ45(1Gb/s)
PoE standards	IEEE802.3 af, IEEE802.3 at
PoE modes	Endspan (1,2+ / 3,6-), Midspan (4,5+ / 7,8-)
Switching capacity	8.8 Gb/s
Protocols Support	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX, IEEE 802.3x, IEEE 802.1D spanning tree protocol, IEEE 802.1w rapid spanning tree protocol, IEEE 802.1Q VLAN tagging
Additional network features	VLAN, IGMP snooping
QoS support	yes
MAC ADDRESS list	4K
FUNCTIONS	
Buttons	1 button to device reset
Surge protection	yes
INSTALLATION PARAMETERS	
RACK Mount 19"	1U
Case	Metal, color navy blue
Dimensions (mm)	284 (W) x 44 (H) x 440 (L)
Weight	4.35 kg
Power Supply	100 ~ 240 VAC, 50/60Hz
Power Consumption	420 W
Power Efficiency	370 W for ports 1 to 24, up to 38 W for one port
Operating Temperature	0°C ~ 40°C

Maximum ranges depend on cable quality, interference and camera model. The ranges were determined in laboratory conditions. For information on the exact ranges for a given camera connection and switches please contact support or perform tests in the real environment of the future operation of the devices.