


Coaxial Cable Signal Transmission

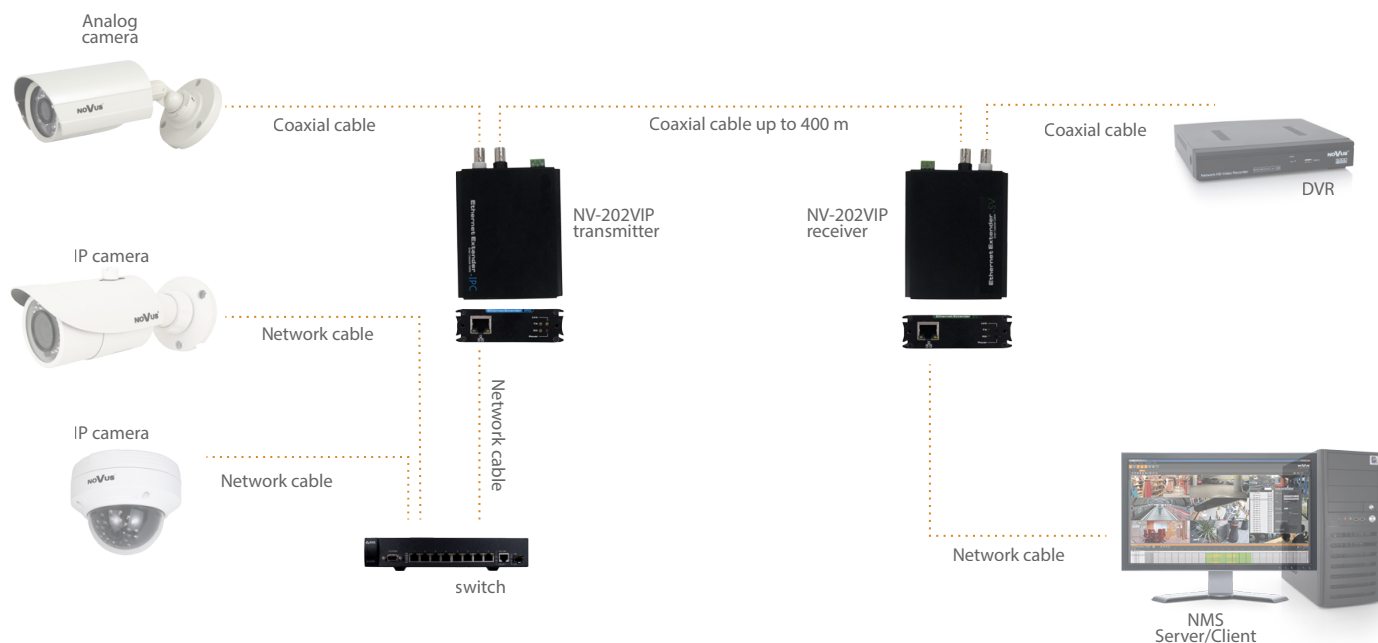

NV-202VIP	
Device Type	Set: analog and digital (from IP cameras) signal transmitter & receiver over common coaxial cable
ANALOG TRANSMISSION	
Video Input/Output	1 x BNC, 1.0 Vp-p, 75 Ohm (transmitter)/1 x BNC, 1.0 Vp-p, 75 Ohm (receiver)
Bandwidth	6 MHz
Signal Transmission Range	Up to 400 m for RG-6, up to 300 m for RG-59
DIGITAL TRANSMISSION (IP)	
Network Interface	1 x RJ45 (transmitter)/1 x RJ45 (receiver)
Transmission Rate	21 Mbps (transmitter->receiver)/3 Mbps (receiver->transmitter)
Signal Transmission Range	Up to 400 m for RG-6, up to 300 m for RG-59
COMMUNICATION BETWEEN TRANSMITTER AND RECEIVER	
Cable Type	Coaxial RG-6, RG-59
Communication Port	1 x BNC (transmitter)/1 x BNC (receiver)
INSTALLATION PARAMETERS	
Dimensions (mm)	122 (W) x 82 (H) x 25 (L)
Weight	Transmitter: 196 g Receiver: 197 g
Case	Aluminium, black
Power Supply	12 ~ 40 VDC/9 ~ 24 VAC
Power Consumption	3 W
Operating Temperature	0°C ~ 55°C