

noVus

Dome IP Camera for internal use

NVIP-4DN3516D/IR-1P



6000 VSS
IP

FUNCTIONS



KEY FEATURES

- Resolution: 4 MPX
- Lens: varifocal, $f=2.8 \sim 12$ mm/F1.4
- D/N function - IR cut filter
- Video content analysis
- microSD card support
- WDR with double scan sensor
- Min. Illumination from 0.07 lx (0 lx, IR on)
- IR LED, range up to 30 m

DIMENSIONS

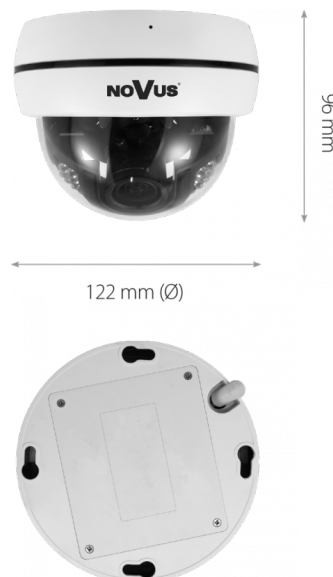


Image	
Image Sensor	4 MPX CMOS sensor 1/3" OmniVision
Number of Effective Pixels	2688 (H) x 1520 (V)
Min. Illumination	0.07 lx/F1.4 - color mode, 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/25 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1/3 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Lens	
Lens Type	varifocal, $f=2.8 \sim 12$ mm/F1.4
Day/Night	
Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 120 s
Switching Schedule	yes
Visible Light Sensor	yes
Network	
Stream Resolution	2560 x 1440 (QHD), 2592 x 1520, 2304 x 1296, 1920 x 1080 (Full HD), 1280 x 720 (HD), 640 x 480 (VGA), 320 x 240 (QVGA)
Frame Rate	30 fps for 60 fps for and lower resolutions
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.265, MJPEG/G.711
Number of Simultaneous Connections	max. 5
Bandwidth	30 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4, IPv4/v6, UDP, HTTPS, Multicast, FTP, DHCP, DDNS, NTP, SNTP, RTSP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP
ONVIF Protocol Support	Profile G/S
Camera Configuration	from Internet Explorer, Chrome browser languages: Polish, English, Russian, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS
Video Analytics	
Functions	tamper, abandoned object, object disappearance, line cross, zone entrance, multi loiter, scene change, video blurred, video color cast
Other functions	
Privacy Zones	4 video mask type: single color or 4 video mask type: mosaic
Motion Detection	yes
Region of Interest (ROI)	3
Image Processing	180° image rotation, sharpening, mirror effect, corridor mode
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card
IR LED	
LED Number	30
Range	30 m
Angle	90°
Interfaces	
Video Output	BNC, 1.0 Vp-p, 75 Ohm
Audio Input/Output	1 x Jack (3.5 mm)/- built-in microphone
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 128GB
Installation parameters	
Dimensions (mm)	122 (Ø) x 96 (H)
Weight	0.36 kg
Enclosure	plastic, white
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Power Consumption	3.5 W, 6 W (IR illuminator on)
Operating Temperature	-20°C ~ 50°C