



Vandal Proof IP Camera with Fisheye Lens

NVIP-6F-6301



FUNCTIONS

H.265


IK10



KEY FEATURES

- Resolution: 6 MPX
- Lens: fisheye, f=1.07 mm/F2.5
- D/N function - IR cut filter
- microSD card support
- Min. Illumination from 0.1 lx (0 lx, IR on)
- IR LED, range up to 30 m

DIMENSIONS

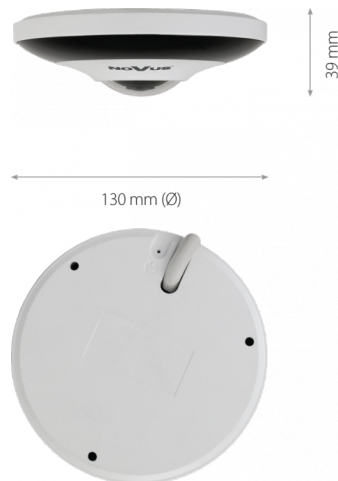

INFORMATION - The name of the model has changed. The previous name is shown in brackets.

Image	
Image Sensor	6 MPX CMOS sensor 1/2.9" SONY Exmor R STARVIS
Number of Effective Pixels	3096 (H) x 2202 (V)
Min. Illumination	0.1 lx/F2.5 - color mode, 0 lx (IR on) - B/W mode
Electronic Shutter	auto: 1/25 s ~ 1/100000 s
Wide Dynamic Range (WDR)	yes
Digital Noise Reduction (DNR)	2D, 3D
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Lens	
Lens Type	fisheye, f=1.07 mm/F2.5
Day/Night	
Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Schedule	yes
Visible Light Sensor	yes
Network	
Stream Resolution	2160 x 2160, 1920 x 1920, 1440 x 1440, 960 x 960, 480 x 480
Frame Rate	30 fps for 2160 x 2160 and lower resolutions
Multistreaming Mode	3 streams
Video/Audio Compression	H.264, H.265, MJPEG/G.711
Number of Simultaneous Connections	max. 11
Bandwidth	16 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4, UDP, FTP, DHCP, DDNS, NTP, RTSP, PPPoE, SMTP, SSL/TLS
Camera Configuration	from Internet Explorer browser languages: Polish, English, Russian, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NVR-6000 Viewer
Mobile applications	SuperLive Plus (iPhone, Android)
Other functions	
Privacy Zones	4
Motion Detection	yes
Prealarm/Postalarm	-up to 120 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card, alarm output activation
Restoring default settings	via web browser, using reset button, via NMS IPTool software
IR LED	
LED Number	6
Range	30 m
Angle	120°
Interfaces	
Video Output	BNC, 1.0 Vp-p, 75 Ohm - maintenance only
Audio Input/Output	1 x Jack (3.5 mm)/1 x Jack (3.5 mm) built-in microphone
Alarm Input/Output	1 (NO/NC)/1
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 128GB
Installation parameters	
Dimensions (mm)	130 (Ø) x 39 (H)
Weight	0.45 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	vandalproof IK10 impact rating aluminium, white
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Power Consumption	5 W, 14.5 W (IR illuminator on)
Operating Temperature	-30°C ~ 50°C

Specification of the NVIP-6F-6301 camera as the successor [NVIP-6DN3618V/IR-1P](#) may be slightly different. Technical data of the [NVIP-6DN3618V/IR-1P](#) is available [here](#).