



27" LCD monitor designed for continuous operation

NVM-6027LCD




FUNCTIONS



KEY FEATURES

- dedicated to continuous operation (24/7)
- anti-glare panel coating eliminating reflections
- short response time (5ms) preventing blurring of dynamic image parts
- image correction options to help you capture all the details even in difficult lighting conditions
- adjustable LED backlight
- three-sided frameless housing

DIMENSIONS

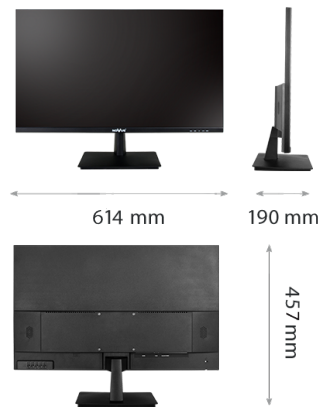

| LCD PANEL | |
|-------------------------|--|
| Panel Type | IPS/AAS, LED backlight |
| Surface treatment | Anti-glare treatment (haze 25%), 3H hard coating |
| Screen Size (Diagonal) | 27" |
| Panel Resolution | 1920 x 1080 |
| Viewable area | 596.74 x 335.66 mm |
| Pixel pitch | 0.3114 mm |
| Format | 16:9 |
| Brightness | 350 cd/m2 |
| Contrast Ratio | 1000:1 |
| Viewing Angle (H/V) | 178°/178° |
| Response Time | 5 ms |
| Refresh frequency | 60 Hz (max) |
| Display Color | 16.7 mln (gamut: sRGB: 94%, DCI-P3: 75%) |
| Other functions | |
| OSD | languages: English, others |
| Built-in Speakers | 2 x 3 W |
| Digital Filter | 3D |
| Interfaces | |
| Video Input | 1 x VGA, 1 x HDMI |
| Audio Input | 1 x Mini Jack stereo, 1 x HDMI (stereo) |
| Installation parameters | |
| Dimensions (mm) | 614 (W) x 457 (H) x 190 (D) |
| Weight | 4 kg |
| Case | black, plastic |
| Power Supply | 12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included) |
| Power Consumption | 30 W (max) 0.5 W (in standby mode) 0.3 W (in off mode) |
| Operating Temperature | +10°C ~ +40°C |
| Humidity | 35% - 85%, relative (non-condensing) |
| Mounting Standard | VESA 100 x 100 mm |

From March 2024, monitors have slightly changed appearance and housing dimensions. The location of the buttons is also different.