


4 NEW CAMERA SERIES

levels of development

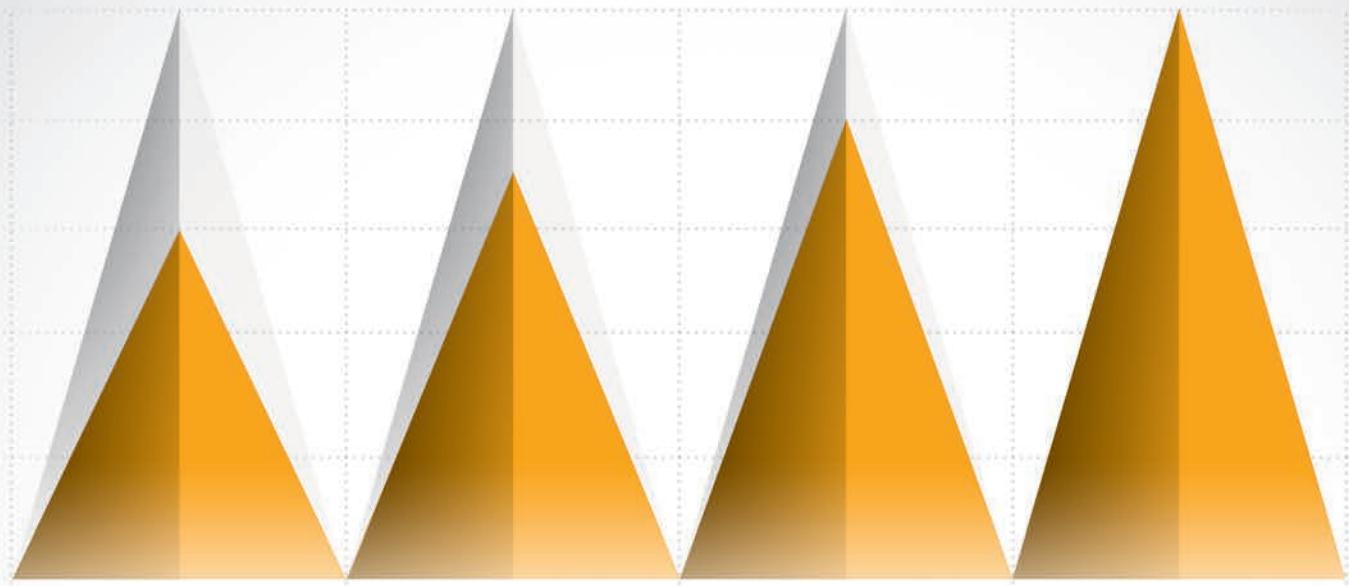

200 SERIES

- Min. Illumination from 0.05 lx
- Up to 700 TVL
- IR LED (selected models)
- Lens f=2.8~11 mm, f=3.5~8 mm, f=3 mm (selected models)



400 SERIES

- **960H image sensor**
- Min. Illumination from 0.001 lx
- Up to 700 TVL
- OSD
- WDR - Wide Dynamic Range
- HLC - High Light Compensation
- DNR - Digital Noise Reduction
- Privacy zones
- Motion detection
- IR LED (selected models)
- Lens f=2.8~11 mm, f=2.8~12 mm, f=3.6 mm (selected models)
- IR-smart function
- Built-in heater (selected models)



600 SERIES

- **960H image sensor**
- Min. Illumination from 0.00001 lx
- Up to 750 TVL
- DSS - Digital Slow Shutter
- OSD
- WDR - Wide Dynamic Range
- HLC - High Light Compensation
- DNR - Digital Noise Reduction
- Privacy zones
- Digital zoom
- Smart zoom
- Motion detection
- DIS - Digital Image Stabilization
- IR LED (selected models)
- F-DNR - eliminates interferences caused by fog, mist, rain and snow
- Lens f=3.6 mm, f=2.8~12 mm (selected models)
- IR-smart function



800 SERIES

- **960H image sensor**
- Min. Illumination from 0.00002 lx
- Up to 700 TVL
- DSS - Digital Slow Shutter
- OSD
- RS-485 remote control (selected models)
- WDR - Wide Dynamic Range
- HLC - High Light Compensation
- DNR - Digital Noise Reduction
- Privacy zones
- Digital zoom
- Motion detection
- DIS - Digital Image Stabilization
- LPR - Licence Plate Recognition (selected models)
- IR LED (selected models)
- Lens f=2.5~12 mm, f=3.5~16 mm, f=6~50 mm (selected models)
- IR-smart function
- Built-in heater (selected models)

