



16-port PoE Switch


NVS-3116SP



KEY FEATURES

- 16 x 100Mb/s PoE+
- 2 x 1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK

DIMENSIONS

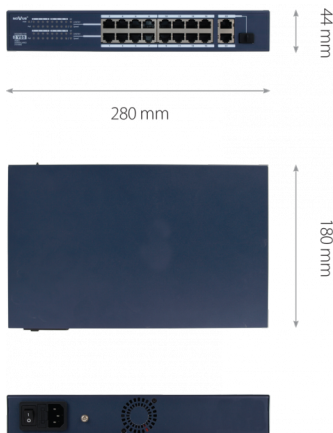

GENERAL	
Device Type	PoE+ Switch
NETWORK	
Ports	PoE+ Ports: 16 x 10Mb/s / 100Mb/s (at the same time the number of available ports on the PoE + mode, limited by capacity power supply), UPLINK SFP port 1Gb/s x1, Uplink Combo x 1 :SFP(1Gb/s) + RJ45(1Gb/s)
PoE standards	IEEE802.3 af, IEEE802.3 at
PoE modes	Endspan (1,2+ / 3,6-)
Switching capacity	7.2 Gb/s
Protocols Support	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
MAC ADDRESS list	4K
INSTALLATION PARAMETERS	
RACK Mount 19"	1U
Case	Metal, color navy blue
Dimensions (mm)	280 (W) x 44 (H) x 180 (L)
Weight	1.9 kg
Power Supply	100 ~ 240 VAC, 50/60Hz
Power Consumption	190 W
Power Efficiency	190 W for ports 1 to 16, up to 30 W for one port
Operating Temperature	0°C ~ 40°C